


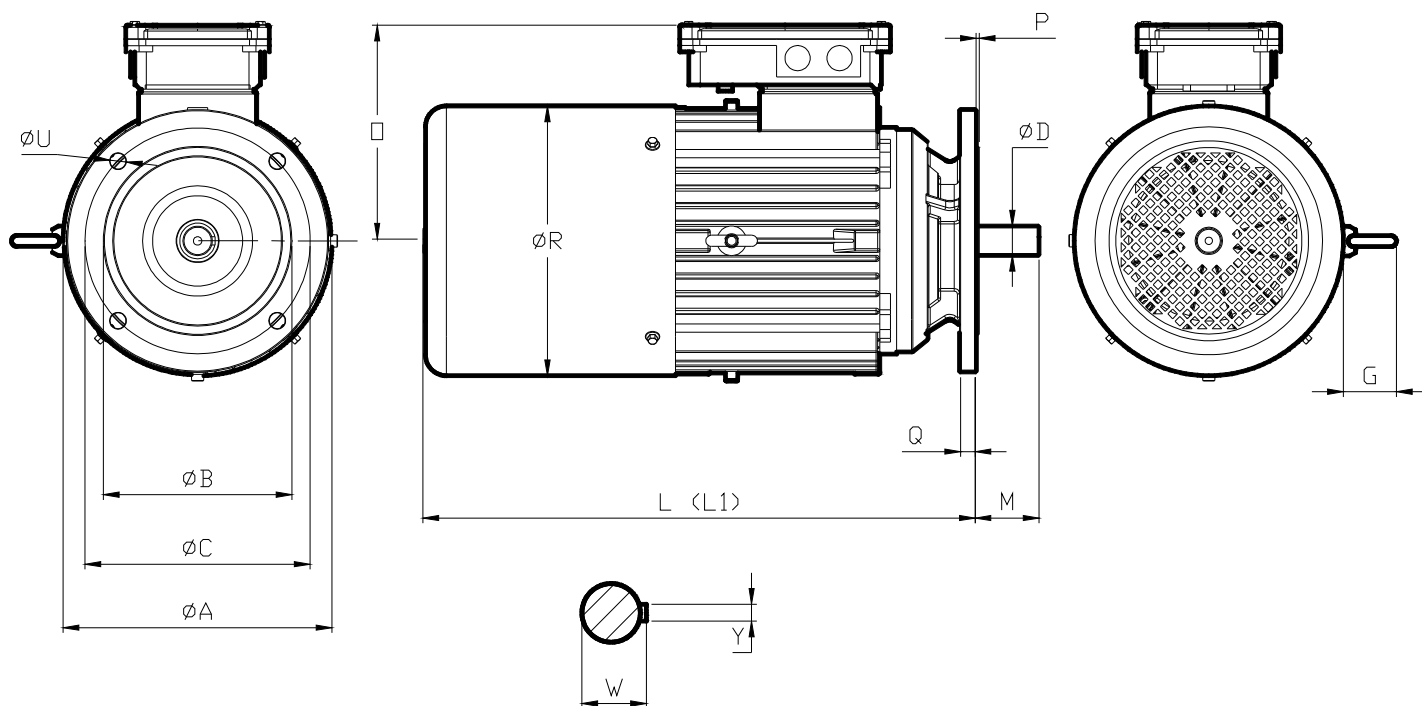

**MOTORI SERIE "MCFA-LC - 4 POLI"**

**MOTORS SERIES "MCFA-LC - 4 POLES"**

| TIPO<br>TYPE | A   | B   | C   | D  | L   | L1 | M   | O     | P | Q  | G  | U    | Y  | W    | FRENO<br>BRAKE<br>(L) |
|--------------|-----|-----|-----|----|-----|----|-----|-------|---|----|----|------|----|------|-----------------------|
| 100R-2.2KW   | 200 | 130 | 165 | 24 | 459 | -  | 50  | 159   | 3 | 12 | -  | 12   | 8  | 30   | K5                    |
| 100R-3KW     | 250 | 130 | 165 | 28 | 459 | -  | 50  | 159   | 3 | 12 | -  | 12   | 8  | 31   | K5                    |
| 132C-5.5KW   | 250 | 180 | 215 | 28 | 570 | -  | 60  | 209   | 3 | 16 | 46 | 15   | 8  | 31   | K7                    |
| 132M-7.5KW   | 300 | 180 | 215 | 38 | 527 | -  | 60  | 209   | 3 | 16 | 46 | 15   | 10 | 41   | K7                    |
| 160M-15KW    | 350 | 250 | 300 | 48 | 579 | -  | 110 | 228.5 | 5 | 14 | 66 | 18.5 | 14 | 51.5 | K8                    |
| 160L-18KW    | 350 | 250 | 300 | 48 | 579 | -  | 110 | 228.5 | 5 | 14 | 66 | 18.5 | 14 | 51.5 | K9                    |
| 160XL-22KW   | 350 | 250 | 300 | 48 | 623 | -  | 110 | 228.5 | 5 | 14 | 66 | 18.5 | 14 | 51.5 | K9                    |

**B/E**  
Besozzi Elettromeccanica